

Stream EM

The vehicle towed solution for extensive 3D utilities mapping



ARRAYS OF MULTI-FREQUENCY, MULTI-POLARIZED ANTENNAS SETTING NEW STANDARDS FOR ACCURACY AND PRODUCTIVITY

IDS Ingegneria Dei Sistemi S.p.A.
GeoRadar Division, Via Enrica Calabresi 24, 56121 Pisa (PI) Italy
Tel. +39 050 31241 Fax +39 050 3124201
georadarsales@idscorporation.com

IDS Brasil Engenharia de Sistemas Ltda.
Av. Paulista 2200 – 16 and.
São Paulo-SP, Brazil, CEP 01310-300
Tel. +55 11 3060 9364 Fax +55 11 3060 9364
idsbr@idscorporation.com

IDS Brasil Engenharia de Sistemas Ltda. Belo Horizonte
Av. Prof. Mario Werneck, 26
Conjto 503 Belo Horizonte - MG, Brazil, CEP 30455-610
Tel. +55 31 3286 1195 Fax +55 31 3286 1195
idsbr@idscorporation.com

IDS North America Ltd.
155 Terence Matthews Cres. Ottawa, Ontario K2M 2A8 Canada
Tel. +1 613 591-0500 Fax +1 613 591-0981
idsna@idscorporation.com

IDSNA, Inc.
14828 W 6th Ave., Suite 12-B, Golden, CO 80401, USA
Phone: + 1 303 232 3047 Fax: + 1 720 519 1087
idsna@idscorporation.com

IDS Australasia Pty Ltd.
Unit 5, 3-5 Hinkler Court, Brendale, Queensland, Australia, 4500
Tel. +61 7 3205 5524 Fax 61 7 3205 5536
idsau@idscorporation.com

IDS Australasia Pty Ltd, Perth
Unit 8, 3 La Fayette Boulevard, Bibra Lake, Western Australia, Australia 6163
Tel: +61 8 9418 8719 Fax: +61 7 320 55536
idsau@idscorporation.com

Stream EM

Stream EM is a vehicle towed radar solution for extensive 3D mapping of underground utilities and features. To accomplish this task it uses massive arrays of multi-polarized, multi-frequency antennas. The use of a massive array enables it to perform fast scans of large areas while maintaining a high level of accuracy. Being multi-polarized provides optimal detection of both longitudinal and transversal features without the need to perform multiple scans.

Stream EM Benefits


- **Cost and time reduction** with no need to block traffic or perform surveys during the night.
- **Increase in accuracy** with a detection accuracy of as little as 5 cm (2 inches).
- **Increase productivity** and able to detect every buried target.
- **Highly modular structure** allows it to be reconfigured to map sidewalks and difficult to access areas.



Stream EM survey

Stream EM Features


- **Massive array of 40 antennas in two polarizations:** This results in accurate 3D modeling of the subsurface and ease of detecting buried targets and anomalies. The use of both polarizations provides optimal detection of main and junction pipes at the same time.
- **Speed:** Stream EM can be towed by a vehicle up to 15 km/h (9mph) and can be run continuously without blocking traffic.
- **Accurate to as little as 5 cm (2 inches):** Stream EM can be interfaced with GPS or a total station in order to accurately geo-locate the surveyed area and to individually distinguish all pipes, cables and anomalies detected.
- **Professional subsurface survey:** Pipes, cables and buried objects can be automatically transferred to CAD and GIS formats allowing a complete subsurface GIS-based digital map to be produced in just a few days.
- **Advanced acquisition and navigation Software** with real-time tomography and survey control with parameter editing.

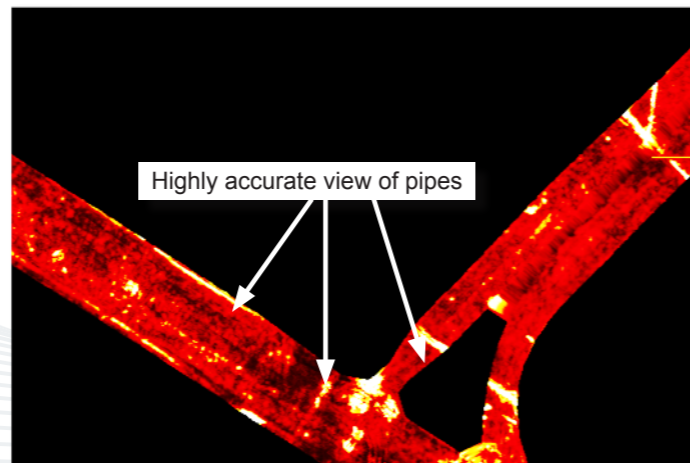

GREED HD 3D CAD: subsurface time slice view

Stream EM Configuration

Stream EM is a modular system which can quickly be reconfigured with optional frames to suit particular requirements or constraints. It is composed of 2 vertical 200MHz Detection of Main Line (DML) arrays for detecting main pipes along the road and 4 horizontal dual frequency 200MHz & 600MHz Detection of Connection Line (DCL) arrays for the detection of shallow and deep junctions.

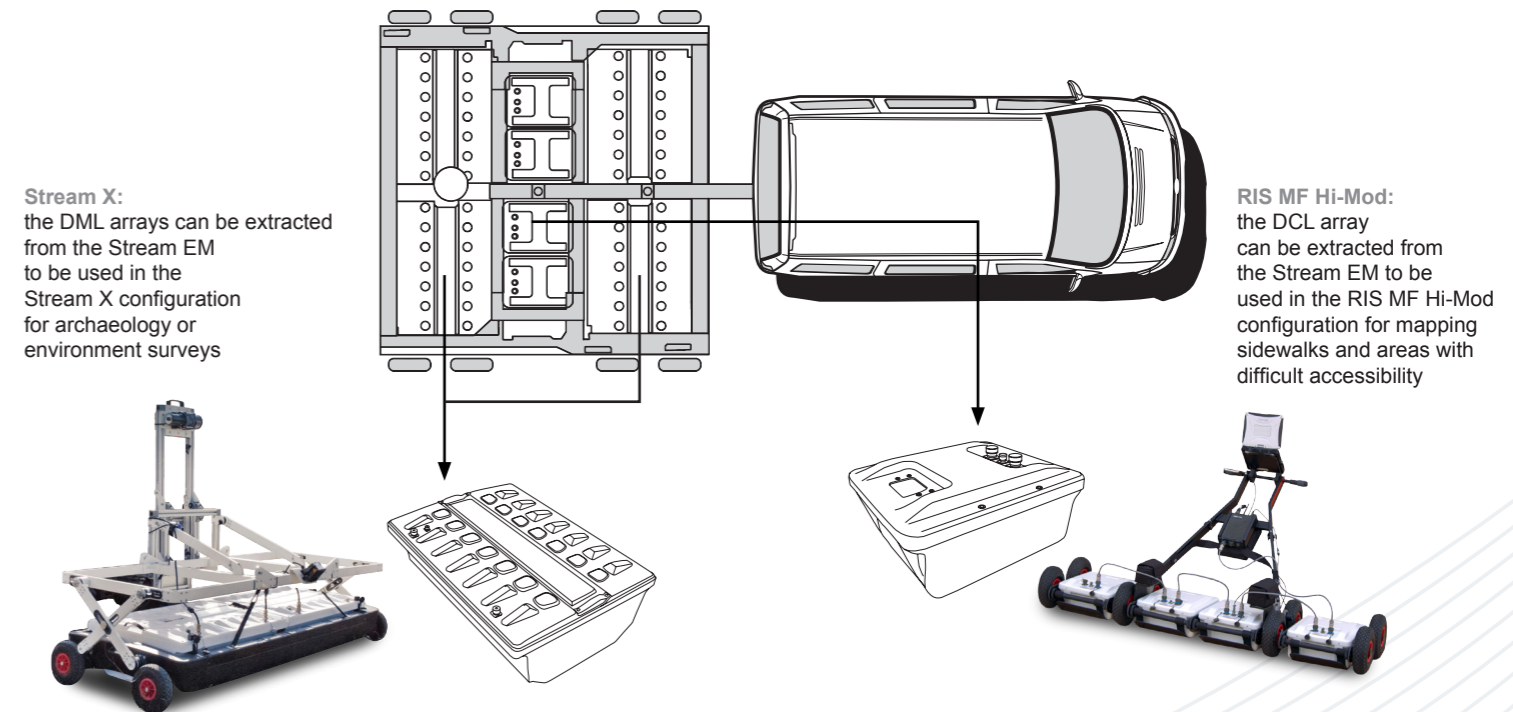


SYSTEM SPECIFICATIONS	
OVERALL WEIGHT (PC NOT INCLUDED)	228kg (500 lbs)
RECOMMENDED LAPTOP	Panasonic CF-31 Tough-Book or similar
MAX. ACQUISITION SPEED (@ STD. SCAN INTERVAL)	15 kph (9mph)
POWER CONSUMPTION	72 W
POSITIONING	Survey wheel and/or GPS or total station
NUMBER OF CONTROL UNITS	3 synchronized DAD MCH FW
SCAN RATE PER CHANNEL: (@512 SAMPLES/SCAN)	87 scans/sec
SCAN INTERVAL	17 scans/m @ 200 MHz 33 scans/m @ 600 MHz
POWER SUPPLY	SLA Battery 12VDC 100 Ah
ANTENNA SPECIFICATIONS	
ENVIRONMENTAL	IP65
ANTENNA FOOTPRINT	1.84 m Width
NUMBER OF CHANNELS	38
ANTENNAS CENTRAL FREQUENCIES	200MHz (34 channels) and 600 MHz (4 channels)
ANTENNA POLARIZATION	Horizontal (HH) and Vertical (VV)
ANTENNA SPACING	6 cm
CERTIFICATION	EC, FCC, IC

SOFTWARE SPECIFICATIONS	
ONEVISION Acquisition Software	<ul style="list-style-type: none"> • Real time tomography • Integrated navigator • Extensive survey management • System and survey set up • GPS management
GREED HD 3D CAD Post Processing Software	<ul style="list-style-type: none"> • Tomographic map view (C-Scan) including radar scan fusion • 3D data visualization • Advanced targeting using radarscan and tomographic view • CAD, GIS exportation of GPR data and target • Synthetic map (only for the Stream family of products) • Radarscan viewer, filter and advanced filtering macros, multiple radar scan viewer • Layer picking for automatic analysis of sub-layers • GPS and map track viewer including X, Y and Z axis and digital map importation • Video handling (option)



Automatic CAD-and GIS transfer

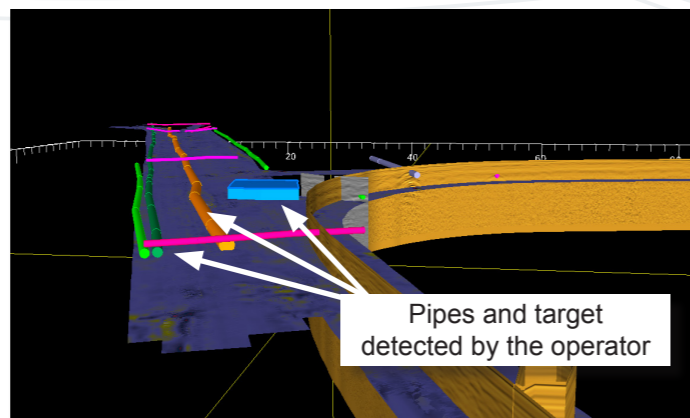

GREED HD 3D CAD: 3D post processing results